

OYPOLEATM

LEISURE



Garden Swing Bench

Safety Instructions

Notice: Ensure you read and fully understand instructions before use

While every attempt is made to ensure the highest degree of protection in all equipment, we cannot guarantee freedom from injury. The user assumes all risk of injury due to use. All merchandise is sold on this condition, which no representative of the company can waive or change.

- This product should only be used for its designated purpose.
- Before using the product, make sure all fastenings are tightly in place and that everything is in order, and checked periodically by an adult.
- Never exceed the maximum load capacity of 200kg, or it may result in product failure or personal injury.
- This product is intended for outdoor use only.
- This product is not a toy, and is only to be used for its designated purpose.
- Do not carry out alterations or modifications to this product.
- Children should be supervised at all times when using the product.
- Leaving the product outside exposed to weather, especially direct sun, rain and salt air, will speed the weathering process. This can be slowed by removing the product from these conditions, or covering it with a suitable cover.
- Only use this product on stable, level and dry ground.
- This product contains small parts that could be a choking hazard if swallowed. Keep these items away from children.
- The user is responsible for the assembly of this product, we recommend that two people assemble this product.
- If the product is damaged or has any defects, please contact cservice@oypla.com

**FOR RECREATIONAL USE ONLY. NOT FOR PROFESSIONAL USE. WEIGHT LIMIT
FOR GARDEN SWING BENCH IS 440 LB 200KG.**

Operating Instructions

Parts List:


If you are missing any of the below parts, please contact cservice@oypla.com

Please be aware that you will be referring to this parts list throughout the assembly process.

Front support leg [x2]  [1]	Back support leg [x2]  [2]	Support beam [x2]  [3]	Leg support [x2]  [4]
Feet stopper [x4]  [5]	Back lower support [x2]  [6]	Swing bench seat [x1]  [7]	Bench handle [x2]  [8]
Spring [x2]  [9]	Canopy side [x2]  [10]	Canopy front & back [x2]  [11]	Large Plug [x4]  [13]
Roof Canopy [x1]  [12]	Small plug [x4]  [14]	Seat padding [x1]  [15]	
XL Bolt [x4]  [16]	Large nut [x6]  [17]	Large bolt [x8]  [18]	Medium bolt [x7]  [19]
Small nut [x20]  [20]	Small bolt [x3]  [21]	Bolt [x4]  [22]	Adjustable screw [x2]  [23]
Wing nut [x2]  [24]	Spanners [x2]  [25]		



1. Begin by taking the front support leg (part 1) and the back support leg (part 2) and placing them either side of the support beam (part 2), making sure that the back support leg is in line with the circular part of the support beam. Please see the guidance arrow in the image above.

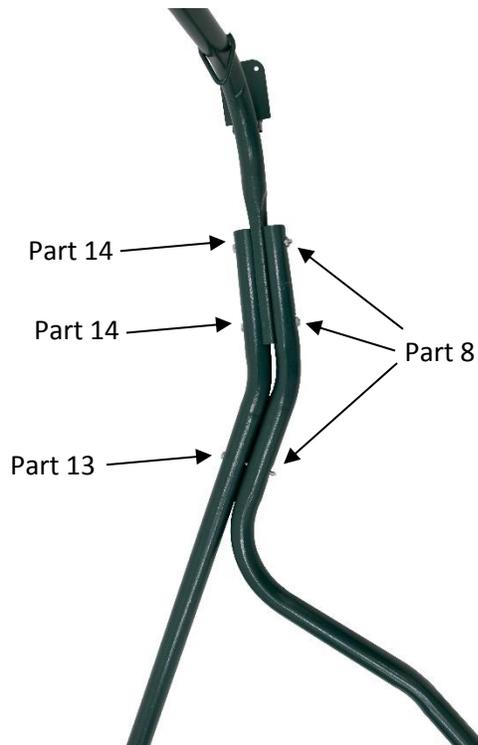

2. Take the front support leg (part 1) and insert two XL bolts (part 16) to secure the front support leg, support beam and back support leg into place. Use the large nuts (part 17) to hold this section into place. Take an large bolt (part 18) and secure the upper section of the legs using a large nut (part 17). Please see the image above. Loosely tighten as you need leverage in the next step.

3. Take the leg support (part 4) and place over the bottom part of the legs. Make sure it is on the opposite side of the support beam, use medium bolts (part 19) to hold the support bar into place before securing them with two small nuts (part 20). Ensure the nuts are held tightly in place. Do not overtighten.



4. Take two foot stoppers (part 5) and carefully slide them onto the bottom of each support leg, please see image above.




5. Now go over the support leg you have created and tighten all nuts and bolts. Do not overtighten.

Please repeat steps 1-5 to create the second support section.



6. Slide both supporting leg sections together. Please see the image above. This part may require two people. Take a medium bolt (part 19) and push it through both joint bars, holding them in place. Secure these by using a small nut (part 20). Secure tightly, but do not overtighten, to ensure the product is stable.

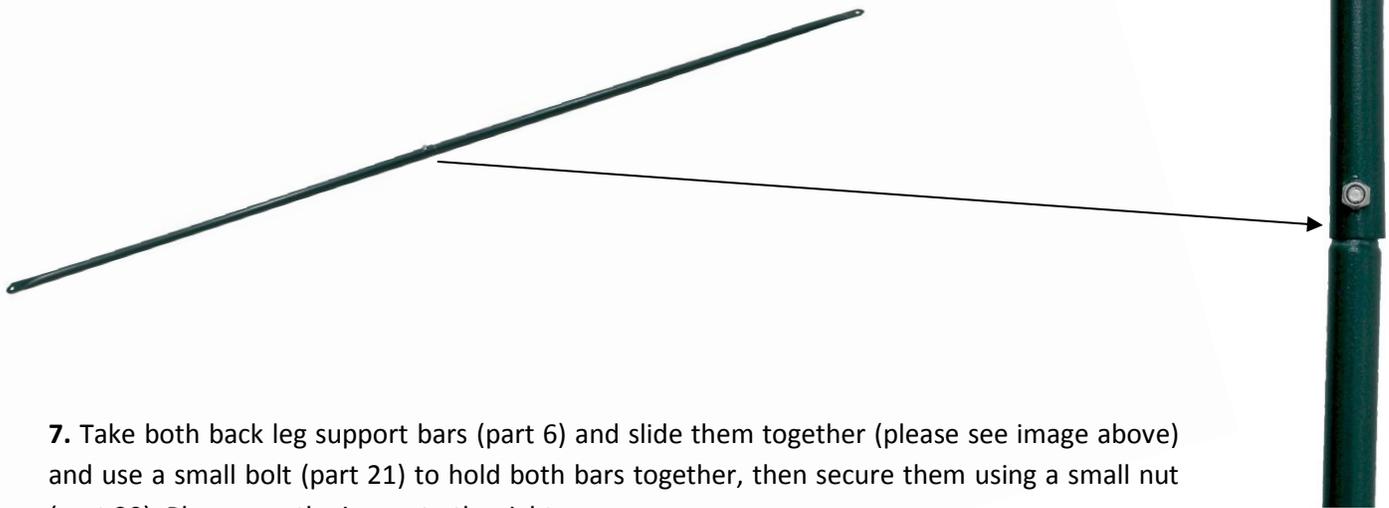

7. Take both back leg support bars (part 6) and slide them together (please see image above) and use a small bolt (part 21) to hold both bars together, then secure them using a small nut (part 20). Please see the image to the right.




8. Take the swing bench seat (part 7) and a swing bench handle (part 8), sliding the bench handle onto the side of the swing bench seat. After this, use four bolts (part 22) to hold the swing bench seat and the swing bench handle together. Secure these with four small nuts (part 20), making sure that they're tightened correctly. Please see image above. Please repeat the previous step on the other side of the swing bench seat, however this side may require force.



9. Slide each spring (part 9) into the top part of the swing bench seat (part 7). Please see image above. Once both springs are hooked onto the seat, slowly lift the seat up to the supporting frame and hook each spring to the part marked A on the image above.



10. Secure the canopy side (part 10) onto the top of the support frame using an adjustment screw (part 23) and a small bolt (part 21). On the outer side of the support frame, ensure they stay in place by securing the adjustable screw (part 23) with a wingnut (part 24). For the small bolt (part 21) it should be secured with a small nut (part 20). Please see the images above.

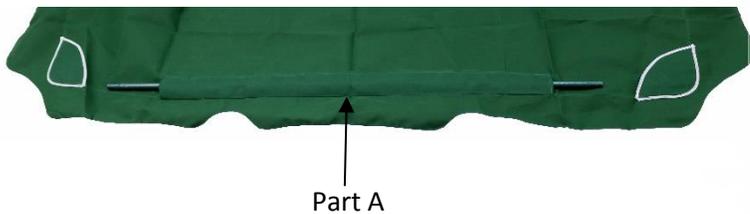

11. Take one of the canopy front or back poles (part 11) and slide the pole through the canopy (part 12), ensuring it goes all the way through (part A). Now use repeat this process for the opposite side. After ensuring the canopy is on correctly, slide both parts into the canopy sides and make sure that they are locked in place in both the front and back (part B). Please see the images above.



12. To make sure the canopy support is held in place, please secure the canopy corners in place by folding the corner flaps over the outer frame as shown in the image above.

13. To ensure the canopy is secure in different weather conditions you should tie the tie ropes in place on the frame, as seen in the image above.



14. Take a large plastic plug (part 13) and slide securely into the location pictured above. Please repeat this step on the opposite side of the swing bench. Some force may be needed to ensure the plugs are secure.



15. Take a small plastic plug (part 14) and slide securely into the location pictured above. Please repeat this step on the opposite side of the swing bench. Some force may be needed to ensure the plugs are secure.



16. Please take the seat padding (part 15) and ensure the flap is secure on the back of the chair, as seen in the image above. To hold the padding into place, please tie the tie ropes onto the frame.



17. Before use please check the product thoroughly, ensuring that all parts are secure before use. You'll have two small nuts (part 20) as spares.

Ensure fully assembled and secure before use.

Please retain a copy of all instructions for future consultation.



An Official Oypla Branded Product

USER MANUAL Model No: 3047