

OYPLA™

GARDEN

THANK YOU FOR YOUR ORDER



Weed Remover

Safety Instructions

Notice: Ensure you read and fully understand instructions before use

While every attempt is made to ensure the highest degree of protection in all equipment, we cannot guarantee freedom from injury. The user assumes all risk of injury due to use. All merchandise is sold on this condition, which no representative of the company can waive or change.

- Make sure all fastenings are tightly in place and that everything is in order before using the product. This should be checked periodically by an adult.
- Do not discard any of the packaging until you have checked that you have all of the parts and fittings required.
- This product is not a toy, and is only to be used for its designated purpose.
- Do not carry out alterations or modifications to this product.
- Clean only with a damp cloth. Do not use strong industrial cleaning substances or abrasive materials as these will damage the product.
- This product is intended for outdoor use only.
- If the product is damaged, or has any defects please contact cservice@oypla.com.




CAUTION – SHARP OBJECTS

Assembly Instructions


Parts List:

If you are missing any of the below parts please contact cservice@oypla.com

Please be aware that you will be referring to this parts list throughout the assembly process.

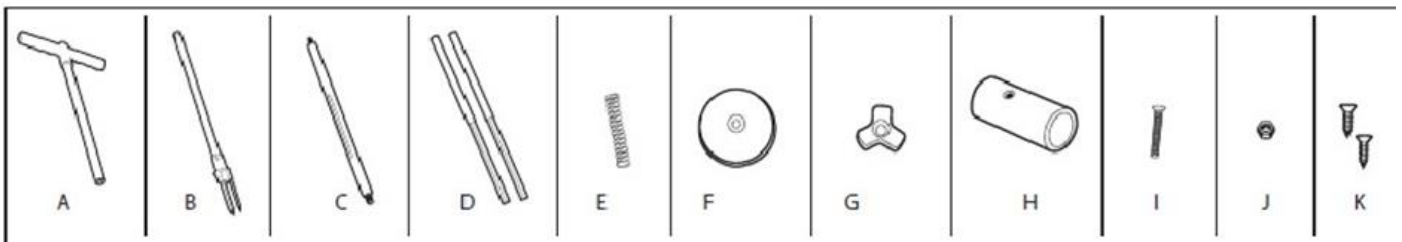

- A:** T-Shaped Handle **B:** 3 Prong Tube **C:** Slotted Ejector Tube **D:** X2 Ejector Tubes
E: Spring **F:** Rounded Cap **G:** Ejector Cap **H:** Plastic Sleeve
I: 1" L Screw **J:** Hex Nut **K:** (x2) 3/4" L Screws

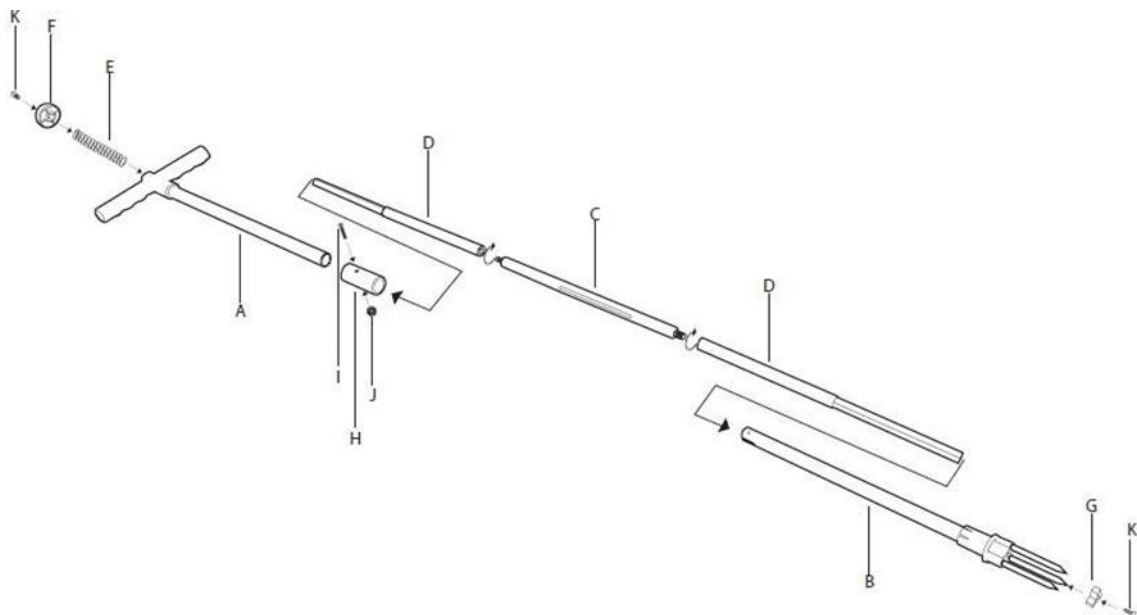

1. Thread an Ejector Tube (D) into each end of the Slotted Ejector Tube (C). Make sure the arrows embossed on the ends line up with each other.
2. The Slotted Ejector Tube (C) has letters embossed on each end (A & B). Insert the ejector tubes into the T-shaped Handle (A) with the letter B in first. Make sure the slot on Slotted Ejector Tube (C) is facing in the same directions as the screw holes on the end of the T-shaped Handle tube.
3. Slide the Spring (E) over the top part of the ejector tube (T-Shaped Handle end).
4. Slide the Rounded Cap (F) over the top part of the ejector tube. Secure the round cap by threading a $\frac{3}{4}$ "L Screw (K) through the centre of the rounded cap into the ejector tube.
5. Slide the Plastic Sleeve (H) over the ejector tube (opposite end of the round cap) onto the T-shaped Handle. Make sure the end with the wider slots (inside of sleeve) is inserted first.
6. Slide the 3 Prong Tube (B) over the ejector tube and connection point of the T-shaped Handle. Make sure the slots (opposite end of prongs) on the 3 prong tube line up with the compressed tubing sides on the connection point of the T-shaped handle. You may need to push firmly to assure all four holes line up (2 in front and 2 in back).
7. Place the Ejector Cap (G) with the flat surface facing outward over the ejector tube (in between the prongs) and secure it by threading in a $\frac{3}{4}$ "L Screw (K) through the ejector cap into the ejector tube.
8. Slide the Plastic Sleeve over the connection point of the t-shaped handle and the 3 prong tube. Make sure the holes line up on both sides.
9. Insert the Hex Nut (J) into the Plastic Sleeve (into hexagon shaped opening). Hold the hex nut with one hand as you thread the 1"L Screw (I) (through the Plastic Sleeve, T-shaped handle, and 3 prong tube) into the hex nut from the opposite end.

HAVE A QUESTION ABOUT YOUR PURCHASE?

OUR DEDICATED CUSTOMER SERVICES TEAM ARE HAPPY TO HELP
CONTACT THEM VIA:

TELEPHONE: 020 3600 2255

EMAIL: cservice@oypla.com

LIVE CHAT: www.oypla.com

PLEASE RETAIN A COPY OF THESE INSTRUCTIONS FOR FUTURE CONSULTATION

OYPLA.COM

An Official OYPLA Branded Product

Imported by Oypla.com LLP, Uxbridge, UB8 2FX

USER MANUAL Model No: 3804