

User Manual

Model Code: 3934

Contents

1 Front Cover

-

2 Safety

Instructions

-

2 Warning

Instructions

-

3 Assembly

Instructions

-

4 Assembly

Instructions

-

5 Assembly Instructions

-

5 Back Cover

End OYPL3



Universal Roof Bars

Model Code: 3934

Oypla.com LLP / www.oypla.com

1 Front Cover

) C-4

2 SafetyInstructions

-

WarningInstructions

-

3 Assembly Instructions

-

4 AssemblyInstructions

-

5 AssemblyInstructions

-

5 Back Cover

End

Safety Instructions

Notice: Ensure you read and fully understand instructions before use

While every attempt is made to ensure the highest degree of protection in all equipment, we cannot guarantee freedom from injury. The user assumes all risk of injury due to use. All merchandise is sold on this condition, which no representative of the company can waive or change.

- The maximum load for these roof bars
 90kg. Never exceed this limit.
- Make sure all fastenings are tightly in place and that everything is in order before using the product. This should be checked periodically by an adult.
- This product is not a toy, and is only to be used for its designated purpose.
- Two people should fit and remove the bars to reduce the risk of damaging the vehicle's roof.
- Regularly check the roof bars and load being carried to ensure they are tight and secure.
- Carrying loads may affect the vehicle's handling and stability, especially when cornering or in strong winds. Take special care and avoid heavy braking or accelerating.
- Do not exceed 55mph.

- The vehicle's stopping distance will be longer when carrying a load.
- Ensure loads are stacked securely and the weight is evenly distributed over both bars. Use straps to ensure the load is secure.
- In cases of long loads, secure the ends of the load with non-elastic rope to the vehicle's bumpers.
- Always remove the bars when using a car wash.
- Remember, when the bars are fitted the height of the vehicle is increased.
- To improve fuel consumption, remove the bars when not in use.
- Clean only with a damp cloth. Do not use strong industrial cleaning substances or abrasive materials as these will damage the product.
- If this product is damaged or has any defects, please contact <u>cservice@oypla.com</u>.

Warnings

The user is responsible for all liability for damage deriving from the vehicle being driven at high speed, being driven incorrectly or from the load or bars being badly positioned or fitted. It is the user's responsibility to ensure that the vehicle is driven safely and that the bars and load are always securely fixed in place throughout the journey.



1 Front Cover

-

SafetyInstructions

_

WarningInstructions

-

3 AssemblyInstructions

-

4 Assembly Instructions

-

5 AssemblyInstructions

-

5 Back Cover

End

Assembly Instructions

Parts List:


- If you are missing any of the below parts, please contact cservice@oypla.com
- Please be aware that you will be referring to this parts list throughout the assembly process.



1

Unlock the mounting brackets on both bars by first moving the plastic red guard. Insert the allen key into the hole and turn anti-clockwise to loosen the bracket. Loosen the bracket until the gripping arms are able to fit onto the vehicle's roof rails.



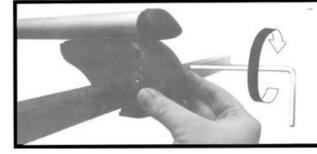

When the mounting bracket is attached to the roof rail, tighten the mounting bracket and

mounting brackets on

repeat with all

the roof bars.

1 Front Cover

-

SafetyInstructions

-

WarningInstructions

-

3 Assembly Instructions

-

4 Assembly Instructions

-

5 AssemblyInstructions

-

5 Back Cover

End

3

Always ensure that the mounting bracket is correctly connected (A) to the roof rail. Incorrect connection (B & C) can lead to unstable loads, causing a danger to other road users.


A B C



C


4

Ensure that there is a minimum distance of 700mm (27.5") between the roof bars when mounted on the roof rails.

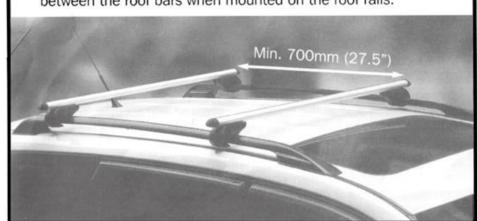

5

When both roof bars are connected correctly, secure them by locking with the security key. The roof bars are secure when the red guars (A) fully covers the allen key hole.

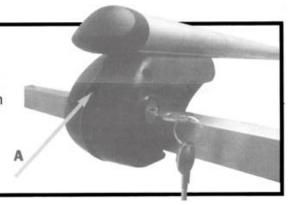

1 Front Cover

_

2 Safety
Instructions

-

WarningInstructions

-

3 Assembly
Instructions

-

4 AssemblyInstructions

-

5 AssemblyInstructions

-

5 Back Cover

End

6

Please ensure any loads secured to the roof bars are distributed evenly (B) (MAXIMUM 90KG), and they do not protrude past the width of the roof. For long loads (C) secure the ends using non-elastic tie-downs to the vehicle's bumpers. Do not exceed a maximum speed of 55mph.

HAVE A QUESTION ABOUT YOUR PURCHASE?

Our dedicated customer services team are happy to help. Contact them via:

Telephone: 020 3600 22 55
Email: cservice@oypla.com
Live Chat: WWW.OYPLA.COM

CONSIDER THE ENVIRONMENT!

In the United Kingdom, approximately 5 billion corrugated boxes are used per year, amounting to around 83 per person! By recycling the cardboard box in which this product was packed, you contribute to the preservation and sustainability of the environment.

If you see a recycling logo on the packaging of your product, such as the below examples, that piece of packaging is recyclable. If there is not a recycling logo, please check with your local authorities before recycling.









PLEASE RETAIN A COPY OF THESE INSTRUCTIONS FOR FUTURE CONSULTATION



AN OFFICIAL OYPLA BRANDED PRODUCT

Model Code: 3934

Oypla.com LLP / www.oypla.com

