



Kid's Wheelbarrow

USER MANUAL Model No: 4217

Safety Instructions

Notice: Ensure you read and fully understand instructions before use

While every attempt is made to ensure the highest degree of protection in all equipment, we cannot guarantee freedom from injury. The user assumes all risk of injury due to use. All merchandise is sold on this condition, which no representative of the company can waive or change.


- Make sure all fastenings are tightly in place and that everything is in order before using the product. This should be checked periodically by an adult.
- Unpacking, installing and fixing the parts are to be completed by an adult.
- Remove any packaging before giving toy to child.
- Do not carry out alterations or modifications to this product.
- Children should be supervised at all times when using the product.
- Clean only with a damp cloth. Do not use strong industrial cleaning substances.
- Leaving the product outside exposed to weather, especially direct sun and rain, will speed the weathering process. This can be slowed by removing the product from these conditions.
- Never exceed the maximum load capacity of 5kg, or it may result in product failure and/or personal injury.
- Only use this product on stable ground.
- Do not discard any of the packaging until you have checked that you have all of the parts and fitting required.
- This product is not suitable for children under the age of 3.
- If the product is damaged or has any defects, please contact <u>cservice@oypla.com</u>


Assembly Instructions

Parts List:

Please check you have all parts below before attempting to assemble this product.

If you are missing any of the below parts, please contact Oypla customer services: cservice@oypla.com

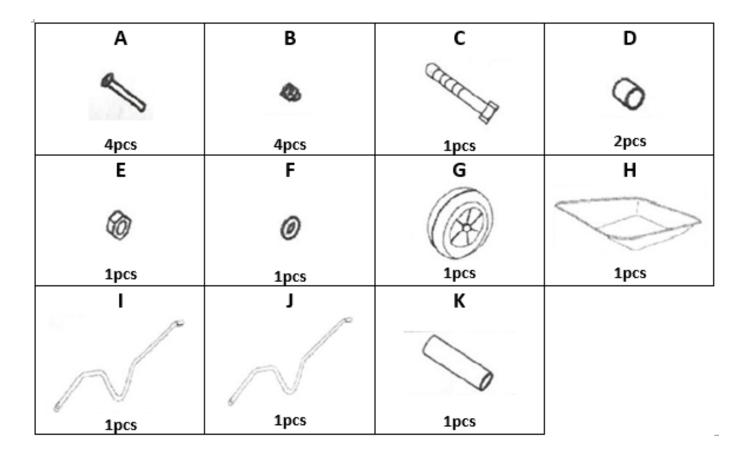





1. Grab the barrow tub (H) and attach it onto the support bars (I, J) using four bolts (A). To secure this, place four screw caps (B) over the end of the screws.

2. Grab the wheel (G) and place the plastic tube (K) through the middle hole in the wheel. Place one stopping cap (D) on either side of the plastic tube (K). Place a washer (F) on one side and follow this with a screw (C).







3. Secure the screw (C) using one nut (E). Tighten this to secure the product together alongside all other nuts. Make sure to not over tighten the nuts.

HAVE A QUESTION ABOUT YOUR PURCHASE?

OUR DEDICATED CUSTOMER SERVICES TEAM ARE HAPPY TO HELP CONTACT THEM VIA:

TELEPHONE: 020 3600 2255 EMAIL: cservice@oypla.com LIVE CHAT: www.oypla.com

PLEASE RETAIN A COPY OF THESE INSTRUCTIONS FOR FUTURE CONSULTATION





An Official OYPLA Branded Product Imported by Oypla.com LLP, Uxbridge, UB8 2FX

USER MANUAL Model No: 4217

