

LEISURE

THANK YOU FOR YOUR ORDER

Contents

- 1 Front Cover
-
- 2 Safety
Instructions
-
- 2 Warning
Instructions
-
- 3 Assembly
Instructions
-
- 4 Assembly
Instructions
-
- 5 Back Cover

End



Roof Bike Carrier

Contents

| | |
|---|-----------------------|
| 1 | Front Cover |
| - | - |
| 2 | Safety Instructions |
| - | - |
| 2 | Warning Instructions |
| - | - |
| 3 | Assembly Instructions |
| - | - |
| 4 | Assembly Instructions |
| - | - |
| 5 | Back Cover |
| | End |

Safety Instructions

Notice: Ensure you read and fully understand instructions before use

While every attempt is made to ensure the highest degree of protection in all equipment, we cannot guarantee freedom from injury. The user assumes all risk of injury due to use. All merchandise is sold on this condition, which no representative of the company can waive or change.

- The maximum load for these roof bars are 15kg each. Never exceed this limit.
- Make sure all fastenings are tightly in place and that everything is in order before using the product. This should be checked periodically by an adult.
- This product is not a toy, and is only to be used for its designated purpose.
- Two people should fit and remove the bars to reduce the risk of damaging the vehicle's roof.
- Regularly check the roof bars and load being carried to ensure they are tight and secure.
- Carrying loads may affect the vehicle's handling and stability, especially when cornering or in strong winds. Take special care and avoid heavy braking or accelerating.
- This carrier is designed to carry a maximum of 1 bicycle. Check the vehicle manufacturer's specification to ensure that you do not overload the roof bars.
- Remove any loose objects from the bicycles e.g. pumps, bottles, etc.
- Always remove the bars when using a car wash.
- The vehicle's stopping distance will be longer when carrying a load.
- Due to the variety in design of vehicles and bicycles, it is the user's full responsibility to ensure no damage occurs whilst using this bike carrier. Correct attachment of the carrier to a vehicle is therefore critical and is beyond control of the manufacturer, distributor or supplier.
- Remember, when the bars are fitted the height of the vehicle is increased.
- To improve fuel consumption, remove the bars when not in use.
- Clean only with a damp cloth. Do not use strong industrial cleaning substances or abrasive materials as these will damage the product.
- This product is not intended for use by persons (including children) with reduced physical, sensory and mental capacities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by persons responsible for their safety.
- If this product is damaged or has any defects, please contact cservice@oypla.com.

Warnings

 The user is responsible for all liability for damage deriving from the vehicle being driven at high speed, being driven incorrectly or from the load or bars being badly positioned or fitted. It is the user's responsibility to ensure that the vehicle is driven safely and that the bars and load are always securely fixed in place throughout the journey.

Contents

- 1 Front Cover
-
- 2 Safety Instructions
-
- 2 Warning Instructions
-
- 3 Assembly Instructions
-
- 4 Assembly Instructions
-
- 5 Back Cover


End

Assembly Instructions

Parts List:


- If you are missing any of the below parts, please contact cservice@oypla.com
- Please be aware that you will be referring to this parts list throughout the assembly process.

1

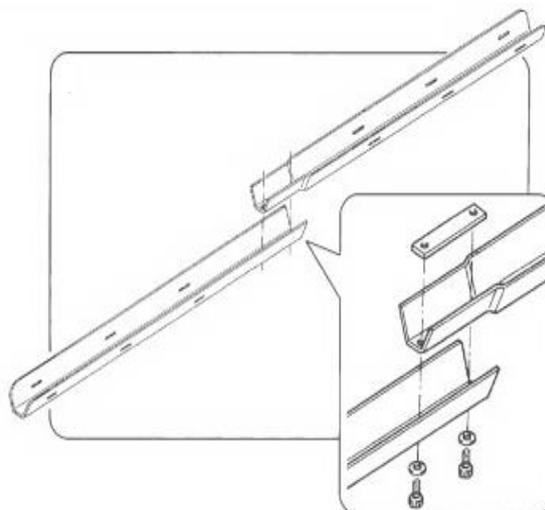

Attach the support bars together using the attachment plate and 2 nuts and bolts.

2

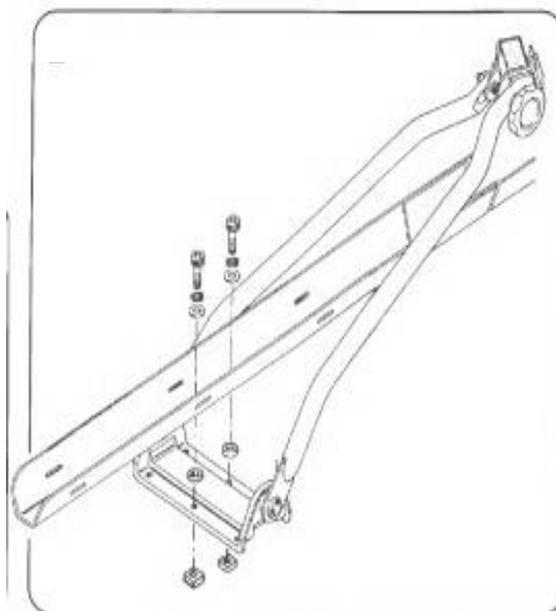


Attach the bicycle holder to the support bars using 2 bolts, nuts, washers and 4 spacers.

Contents

- 1 Front Cover
-
- 2 Safety Instructions
-
- 2 Warning Instructions
-
- 3 Assembly Instructions
-
- 4 Assembly Instructions
-
- 5 Back Cover


End

3

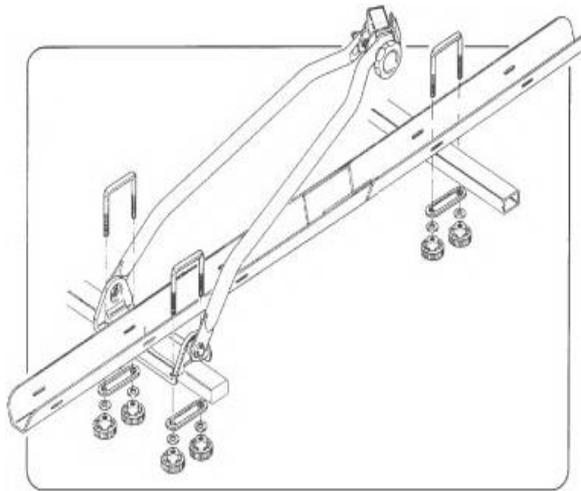


Attach the carrier to the roof bars using the U-shaped bolt, spacers and nuts.

4

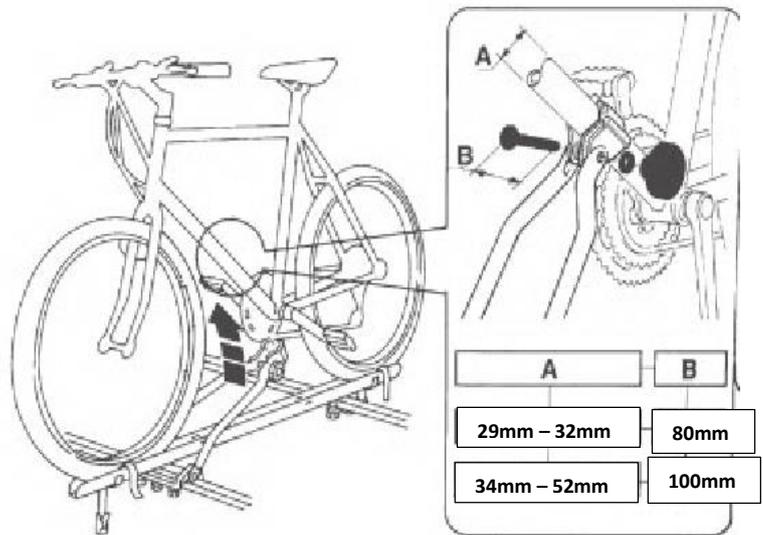

Attach the support clamp to the frame of the bike. For a frame of diameter 29-32mm, use the 80mm bolt to secure. For a frame of diameter 34-52mm, use the 100mm bolt to secure.

5

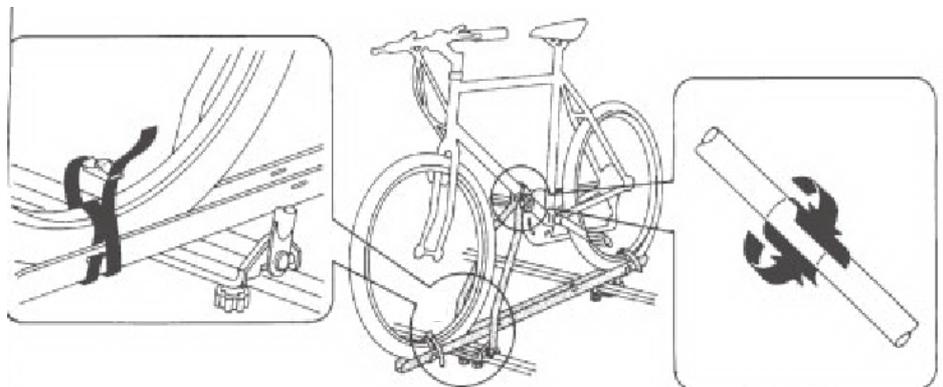

Secure the bike to the carrier by strapping down the front and back wheels. Please see diagram above to help. Ensure tightly secure before departure.

Contents

| | |
|---|-----------------------|
| 1 | Front Cover |
| - | - |
| 2 | Safety Instructions |
| - | - |
| 2 | Warning Instructions |
| - | - |
| 3 | Assembly Instructions |
| - | - |
| 4 | Assembly Instructions |
| - | - |
| 5 | Back Cover |
| | End |

HAVE A QUESTION ABOUT YOUR PURCHASE?

Our dedicated customer services team are happy to help. Contact them via:

Telephone: 020 3600 22 55
Email: cservice@oypla.com
Live Chat: WWW.OYPLA.COM

CONSIDER THE ENVIRONMENT!

In the United Kingdom, approximately 5 billion corrugated boxes are used per year, amounting to around 83 per person! By recycling the cardboard box in which this product was packed, you contribute to the preservation and sustainability of the environment.

If you see a recycling logo on the packaging of your product, such as the below examples, that piece of packaging is recyclable. If there is not a recycling logo, please check with your local authorities before recycling.



PLEASE RETAIN A COPY OF THESE INSTRUCTIONS FOR FUTURE CONSULTATION

OYPLA.COM

AN OFFICIAL OYPLA BRANDED PRODUCT

Imported by Oypla.com LLP, Uxbridge, UB8 2FX

Model Code: 4269

Oypla.com LLP / www.oypla.com